


Installation Guide


Installation shall be in accordance with AS/NZS3500.1 and AS/NZS3500.2






NOTICE


- 1. Make sure the water supply valve is shut off before
- 2. Remove old bolts, silicon, putty ect from base area




MAINTENANCE


Use soft moist cloth for cleaning of the toilet, cistern, seat and lid. Do not use abrasives and hard cloth. Regular cleaning with the soap solution is recommended. Do not use strong bleaching agents. In case acid liquids penetrate on the surface remove them immediately with soft cloth.

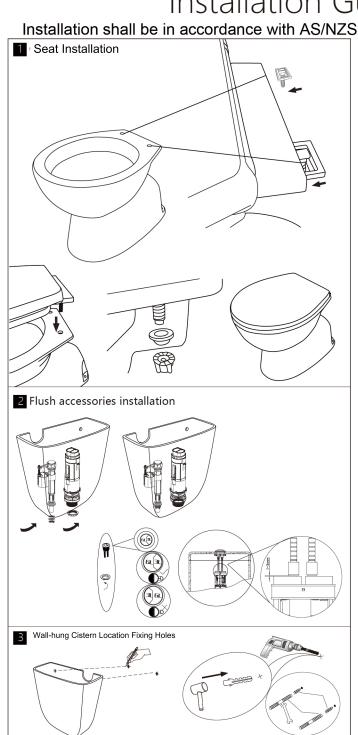

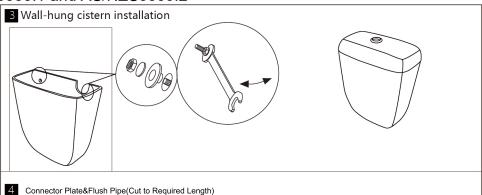

















5 Screw Mounting for Pan

